

Environmental Product Declaration


as per ISO 14025 and EN 15804

Owner of the declaration:	EEW Pipe Production Erndtebrück GmbH & Co.KG
Publisher:	Kiwa-Ecobility Experts
Programme operator:	Kiwa-Ecobility Experts
Registration number:	EPD-Kiwa-EE-000411-EN
Issue date:	21.10.2024
Valid to:	21.10.2029



Line and process pipes

Ready-to-install and individually fabricated single pipes for feeding oil, gas, water, steam or other process fluids or gases.

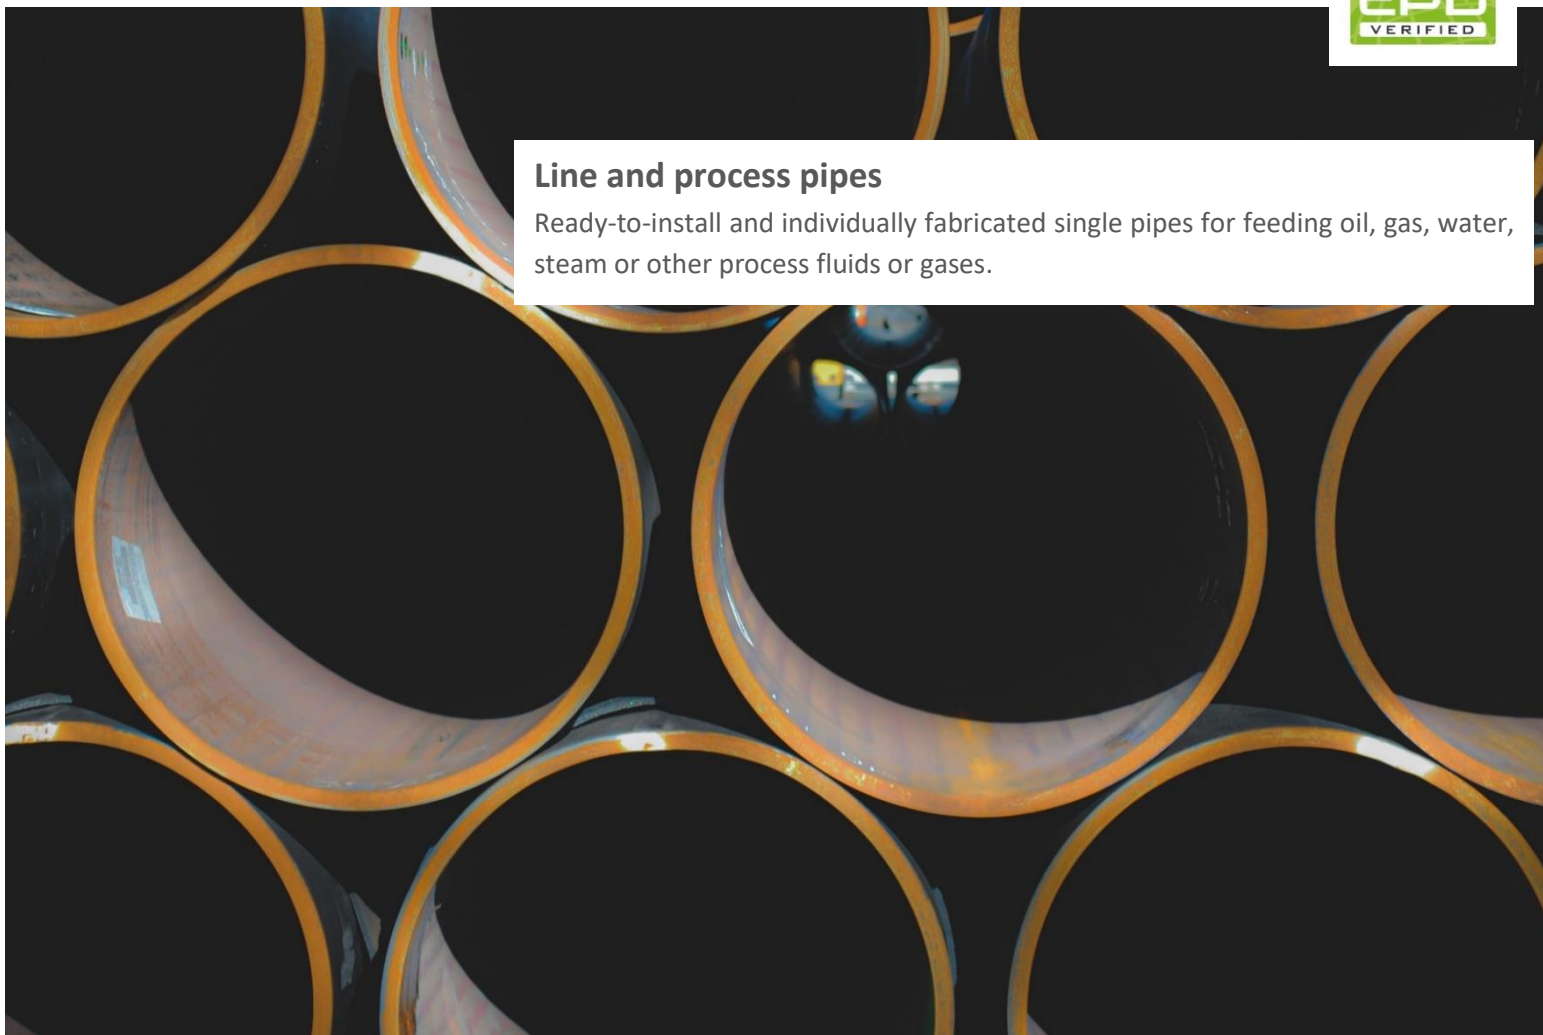

1. General information

Erntdebrücker Eisenwerk (EEW)

Programme operator

Kiwa GmbH, Ecobility Experts
Wattstraße 11-13
Haus 1, 3. OG, TH 1
13355 Berlin
Germany

Registration number

EPD-Kiwa-EE-000411-EN

This declaration is based on the Product**Category Rules**

PCR A – General Program Category Rules for Construction Products, Kiwa-Ecobility Experts, Berlin, 2022.

PCR B – construction steel products (Edition 2020-03-13 (draft))

Issue date

21.10.2024

Valid to

21.10.2029



Raoul Mancke
(Head of programme operations, Kiwa-Ecobility Experts)



Kripanshi Gupta
(Verification body, Kiwa-Ecobility Experts)

Line and process pipes

Owner of the declaration

EEW Pipe Production Erndtebrück GmbH & Co.KG
Im Grünewald 2,
57339, Erndtebrück,
Germany

Declared product / declared unit

1 metric ton line and process pipes

Scope

The EPD is about ready to install and individually fabricated line and process pipes, produced and distributed by EEW PPE, located in Erndtebrück, Germany. Line and process pipes are used for feeding oil, gas, water, steam or other process fluids or gases. The EPD refers to this specific kind of product concerning individual kinds of the line and process pipe designs. The results of this EPD are representative for European Union.

EPD type: Cradle to gate with modules C1-C4, and module D.

Kiwa-Ecobility Experts assumes no liability for manufacturer's information, LCA data and evidence.

Verification

The European standard EN 15804+A2:2019 serves as the core PCR.

Independent verification of the declaration and data, according to EN ISO 14025:2010.

internal

external



Anne Kees Jeeninga
(Third party verifier)

2. Product

2.1 Product description

The line and process pipes from EEW PPE are delivered in fabricated length or ready-to-install as individually pre-fabricated single pipes.

2.2 Application

Line and process pipes are used in an ultimate wide range of applications such as feeding oil, gas, water, steam or other process fluids or gases. Applications are found in on and offshore pipelines, power generating plants, refineries as well in Hydrogen - ready piping systems and cryogenic systems. Furthermore shells for pressure vessels, whatever used for, are produced.

2.3 Reference Service Life (RSL)

The service life of the construction will limit the lifetime of the line and process pipes, which is 30 years.

2.4 Technical data

The technical data is listed in the table below. The values for unit weight depend on the product type and its corresponding dimensions. For this reason, only the max. value is given here.

Table 1: Technical data of the line and process pipes- EEW PPE

Characteristic	Value/Tolerance	Unit
Diameter range	300 – 3000	mm
Length range Single pipe length	500-380000 Up to 13200	mm
Wall thickness range	10-120	mm
Weight Range Single pipe weighth	Up to 100000 Up to 25000	kg
Tensile strength	360 – 900	MPa
Yield strength	235 – 690	MPa

2.5 Substances of very high concern

The product does not contain substances from the "Candidate list of substances of very high concern for authorisation" (SVHC).

2.6 Base materials / Ancillary materials

Line and process pipes from EEW PPE are manufactured using steel heavy plates:

Table 2: Composition of the line and process pipes- EEW PPE

Raw material	value	unit
Heavy plates: API 5 L X60-X80QT/S/M/BM/BN ASTM A516 Gr.60MS L415/450/485 ASTM A387 Gr.11/22/5/91	99.3	%
Welding rod	0.7	%

There is no biogenic carbon in the products.

2.7 Manufacturing

The manufacturing is located at EEW Pipe Production Erndtebrück GmbH & Co. KG, im Grünewald 2, 57339, Erndtebrück, Germany.

The production of the line and process pipes comprises the following process steps and is shown in the following figure:

1. Unloading of plate materials; incoming goods inspection; plate storage
2. Raw material storage and transport
3. Weld seam preparation
4. Pre-bending of prepared plates
5. JCO bending plate to pipe
6. Tack welding
7. Inside SAW welding
8. Back-milling of tack weld (optional)
9. Outside SAW welding
10. Heat treatment (if required)
11. Calibration / sizing
12. None destructive testing including hydrotesting
13. Final inspection and marking
14. Pipe storage and loading for shipment

There is no packaging used for this product. Only load securing - square timbers, wooden wedges, rubber mats, and tension belts are used.

2.8 Other Information

For further information on line and process pipe, please visit the official EEW PPE webpage under the following link:

([EEW PPE in Erndtebrück - Kompetenzzentrum für Line and process pipes \(eew-group.com\)](http://www.eew-group.com))

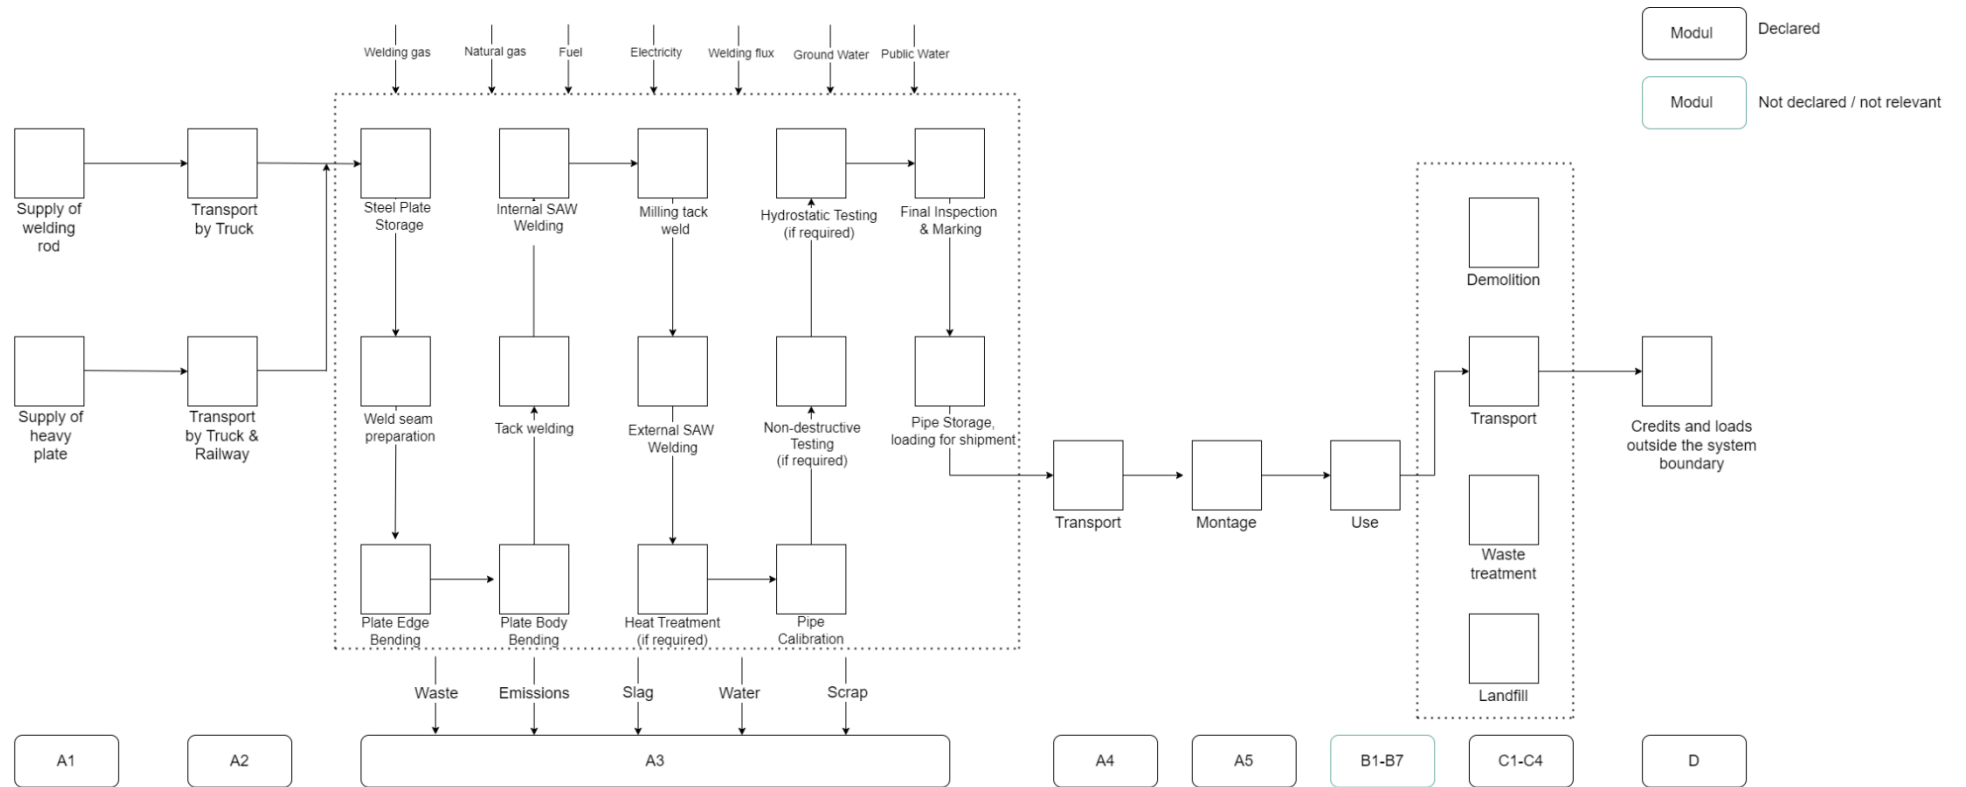


Figure 1: Process flow chart of the production of the line and process pipe- EEW PPE

3. LCA: Calculation rules

3.1 Declared unit

In accordance with PCR B – construction steel products (Edition 2020-03-13 (draft)), one metric ton of the line and process pipes is chosen as the declared unit.

3.2 Conversion factors

Table 3: Conversion Factor

Product	Unit	Value
Declared Unit	metric ton of the line and process pipes	1
Conversion factor to 1 kg	-	0.001

3.3 Scope of declaration and System boundaries

This EPD assesses all potential environmental impacts of the product from cradle to factory gate, with additional options. In addition to the production stages (modules A1-A3), the EPD also includes transport to the customer (module A4), installation (module A5), end-of-life stages (modules C1-C4), and the benefits and loads beyond the system boundaries (module D).

The manufacturing phase includes the production or extraction of the source materials, the transport to the respective production plant, and the production of the pipes. All inputs (raw materials, precursors, energy, and auxiliary materials), as well as the by-products and waste, are considered for all life cycle phases.

The year 2022 represents the time reference for raw materials and electricity consumption. By defining the scenarios (transport from the production site and choice of the end-of-life scenarios) according to specifications of the Dutch Environmental Database (Nationale Milieudatabase (NMD)), the Netherlands is the relevant geographical reference for the end of life scenario. Environmental effects such as the greenhouse effect can occur with a substantial spatial and temporal offset.

All benefits and loads beyond the system boundary (Module D) resulting from reusable products, recyclable materials and/or useful energy carriers leaving the product system are considered in this LCA. The following production steps are considered during the production phase:

Table 4: Description of the system boundary

Description of the system boundary																
Product stage			Construction process stage		Use stage							End of life stage				Benefits and loads beyond the system boundaries
Raw material supply	Transport	Manu-facturing	Transport from manu-facturer to place of use	Construction-installation process	Use	Main-tenance	Repair	Replacement	Refur-bishmen	Operational energy use	Operational water use	De-construction / demolition	Transport	Waste processing	Disposal	Reuse-Recovery-Recycling-potential
A1	A2	A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
X	X	X	X	X	ND	ND	ND	ND	ND	ND	ND	X	X	X	X	X

X=Module declared | ND= Module not declared

The waste materials and quantities produced are included in the respective modules.

3.4 Geographical reference area

Line and process pipes of EEW PPE are marketed worldwide. After the final inspection, line and process pipes are ready to be shipped. No average transport distances could be determined as the logistics process is organized by customer or EEW depending on contractual agreement. A frequent shipment is transported by truck to Antwerp port and distributed world-wildly.

3.5 Cut-off criteria

All flows that influence is higher than 1% on the total mass, energy, or environmental impact are included in the LCA. All process-specific data could be determined and modelled by generic data (ecoinvent 3.6).

3.6 Allocation

Line and process pipes account for 38% of total EEW PPE output by mass. As a result, all supplier contributions, energy usage, and additional materials were allocated proportionally according to the mass ratio.

During the production of the line and process pipe, no co-products are generated.

3.7 Data collection and reference time period

For all processes, primary data was collected and provided by EEW PPE. The primary data refers to the year 2022.

Secondary data were taken from the ecoinvent 3.6 database, released in 2019. The database is regularly checked and thus complies with the requirements of ISO 14040/44 (background data not older than 10 years). The background data meets the requirements of EN 15804.

The quantities of raw materials, consumables and supplies used as well as the energy consumption have been recorded and averaged over the entire year of operation.

R<THINK EPD web application from the company NIBE was used to model the life cycle for the production and disposal of the declared product systems. To ensure that the results are comparable, consistent background data from the international database ecoinvent was used in the LCA (e.g., data records on energy, transport, auxiliary materials, and supplies). Almost all consistent data sets contained in the ecoinvent database are documented and can be viewed online.

The general rule that specific data from certain production processes or average data derived from certain processes must have priority when calculating an EPD or LCA was observed. Data for processes over which the manufacturer has no influence were assigned to generic data.

3.8 Estimates and assumptions

Transport distances for all raw materials (raw materials, operating materials, packaging) could be recorded. A payload factor of 50% was used for all truck transports (suppliers, disposal transports, and internal transports), which corresponds to a full delivery and empty return trip. A data set for a non-specific truck was used.

The energy and material consumptions are average values and refer to the year 2022.

The total amount of waste products generated, including slag, dust, and scrap, was reported at 6.7 kg per ton of product.

The proportions of the waste products are used as a reference value for calculating the raw material production waste amount.

$$p_{\text{production waste amount}} (\%) = \frac{m_{\text{waste,raw material}}}{m_{\text{raw material}}}$$

As a result, in the following report, overall 0.67 %, of the steel raw material is considered waste during production.

Line and process pipes are marketed worldwide. Precise transport distances vary, as logistics are managed either by the customer or EEW PPE. For transportation to the construction site (module A4), a common route involves shipping via truck to Antwerp port, covering an estimated distance of 340 km. From Antwerp port, distribution spans across the world.

EEW is not responsible for installing the line and process pipes, so a fictive installation scenario (module A5) was assumed based on literature. This scenario includes the use of a self-propelled jack-up barge, 600 tons, with two engines consuming 310 liters/hr (while in operation) for a full day (24 hr), along with one generator consuming 88 liters/hr (while on standby) for 12 hours.

No CO₂ certificates were considered.

3.9 Power mix

In general, a market-based approach was applied for electricity consumption in production (module A3). The electricity profile was modeled in SimaPro based on the provided Guarantees of Origin (GOs). This profile has a total Global Warming Potential (GWP) of 0.0459 kg CO₂-equivalent per kWh.

3.10 Comparability

In principle, a comparison or assessment of the environmental impacts of different products is only possible if they have been prepared in accordance with EN 15804.

For the evaluation of the comparability, the following aspects have to be considered in particular: PCR used, functional or declared unit, geographical reference, the definition of the system boundary, declared modules, data selection (primary or secondary data, background database, data quality), scenarios used for use and disposal phases, and the life cycle inventory (data collection, calculation methods, allocations, validity period). PCRs and general program instructions of different EPDs programs may differ. Comparability needs to be evaluated. For further guidance, see EN 15804+A2 (5.3 Comparability of EPD for construction products) and ISO 14025 (6.7.2 Requirements for comparability).

4. LCA: Scenarios and additional technical information

The distance to the construction site (module A4) was calculated according to the Dutch National Environmental Database (Nationale Milieu Database) method. Accordingly, the distance for transporting to the construction site was considered (340 km) by truck.

Due to a high life expectancy and the fact that EEW is not responsible for this, there is no company data available on the material recovery of the installed line and process pipe. However, since there is a high potential for recycling and reusing steel pipe, this solution remains an attractive possibility. So, it is assumed that removal will be performed in the same manner as installation, a self-propelled jack-up barge, 600 ton, two engines 310 liters/hr (steaming) for one day (24 hr) with one generator 88 liters/hr (standby) for 12 hr, with the addition of an oxy-fuel cutting operation are stated for module C1 (demolition).

For the calculation of end-of-life, the standard waste scenario for steel, permanent (100yr) sheet piles placed in soil/marine water was followed based on the "national milieu databank" (NMD ID 90). This defines the waste scenario as 63.2% recycling and 36.8% to be left.

Note: The transport distances of the waste are based on the standard waste scenarios of the NMD Determination Method (SBK 2019): incineration 150 km/ recycling 50 km/landfill 100 km; vehicle: truck, unspecified. For energy recovery, it is assumed that only fossil raw materials are substituted, considering the calorific values of the raw materials of the declared product and energy and thermal efficiencies of 18% and 32%. According to EN 15804, loads are credited in A3 or C3 to C4, and benefits are credited in module D.

For all road transports, the environmental profile of a non-specific truck transport was used (conservative assumption): The vehicle operates with diesel and provides a fleet average that includes different lorry classes and EURO classes. This environmental profile contains data for transport, which is calculated for an average load factor, including empty return trips (ecoinvent 3.6).

5. LCA: Results

5.1 Results of the LCA – Environmental Impact

The following tables show the results of the impact assessment indicators, resource use, waste, and other output streams. The results presented here refer to the declared specific product.

Disclaimer on ADP-e, ADP-f, WDP, ETP-fw, HTP-c, HTP-nc, SQP: The results of these environmental impact indicators must be used with caution, as the uncertainties in these results are high or as there is limited experience with the indicator.

Disclaimer on IR: This impact category mainly addresses the potential effect of low-dose ionizing radiation on human health in the nuclear fuel cycle. It does not consider effects due to possible nuclear accidents and occupational exposures, nor does it consider radioactive waste disposal in underground facilities. Potential ionizing radiation from soil, radon, and some building materials are also not measured by this indicator.

Table 5: Results

Results of the LCA – Environmental impact: 1 ton line and process pipes (EN 15804+A2)												
Parameter	Unit	A1	A2	A3	A4	A5	C1	C2	C3	C4	D	Total A1-A3
Core environmental impact indicators												
ADP-mm	kg Sb-eqv.	7.09E-02	1.40E-03	2.42E-03	1.15E-03	1.34E-04	1.37E-04	1.07E-04	0.00E+00	1.74E-05	-5.42E-04	7.47E-02
ADP-f	MJ	4.43E+04	8.98E+02	3.86E+03	6.87E+02	1.20E+03	1.21E+03	6.39E+01	0.00E+00	5.30E+01	-5.60E+03	4.91E+04
AP	mol H ⁺ eqv.	2.11E+01	3.65E-01	5.04E-01	2.64E-01	9.11E-01	9.14E-01	2.46E-02	0.00E+00	1.80E-02	-3.10E+00	2.20E+01
EP-fw	kg PO ₄ eqv.	2.51E-01	8.17E-04	3.52E-03	4.60E-04	3.17E-04	3.79E-04	4.27E-05	0.00E+00	2.12E-05	-2.83E-02	2.56E-01
EP-m	kg N eqv.	4.23E+00	1.28E-01	1.11E-01	9.31E-02	4.02E-01	4.02E-01	8.65E-03	0.00E+00	6.19E-03	-5.74E-01	4.46E+00
EP-t	mol N eqv.	4.70E+01	1.42E+00	1.29E+00	1.03E+00	4.41E+00	4.42E+00	9.54E-02	0.00E+00	6.84E-02	-6.70E+00	4.97E+01
GWP-b	kg CO ₂ eqv.	3.12E-01	6.27E-02	1.25E+00	2.10E-02	2.42E-02	4.20E-02	1.95E-03	0.00E+00	3.74E-03	8.35E+00	1.62E+00
GWP-f	kg CO ₂ eqv.	4.14E+03	5.97E+01	2.18E+02	4.56E+01	8.71E+01	8.77E+01	4.23E+00	0.00E+00	1.90E+00	-8.03E+02	4.42E+03
GWP-luluc	kg CO ₂ eqv.	2.16E+00	2.73E-02	1.21E-01	1.67E-02	6.86E-03	8.22E-03	1.55E-03	0.00E+00	5.29E-04	5.92E-01	2.31E+00
GWP-total	kg CO ₂ eqv.	4.15E+03	5.98E+01	2.19E+02	4.56E+01	8.71E+01	8.77E+01	4.24E+00	0.00E+00	1.90E+00	-7.94E+02	4.43E+03
ODP	kg CFC 11 eqv.	2.24E-04	1.26E-05	2.88E-05	1.01E-05	1.88E-05	1.89E-05	9.35E-07	0.00E+00	7.81E-07	-1.96E-05	2.66E-04
POCP	kg NMVOC eqv.	2.03E+01	4.01E-01	3.91E-01	2.93E-01	1.21E+00	1.21E+00	2.72E-02	0.00E+00	1.98E-02	-4.56E+00	2.11E+01
WDP	m ³ world eqv.	1.02E+03	3.73E+00	2.76E+01	2.46E+00	1.61E+00	2.62E+00	2.28E-01	0.00E+00	2.38E+00	-1.53E+02	1.06E+03
Additional environmental impact indicators												
ETP-fw	CTUe	1.95E+05	8.19E+02	2.70E+03	6.13E+02	7.22E+02	7.30E+02	5.69E+01	0.00E+00	3.44E+01	-2.69E+04	1.99E+05
HTP-c	CTUh	3.49E-05	2.96E-08	3.52E-07	1.99E-08	2.52E-08	2.54E-08	1.85E-09	0.00E+00	7.96E-10	-1.04E-07	3.53E-05
HTP-nc	CTUh	2.69E-04	8.98E-07	8.93E-06	6.70E-07	6.20E-07	6.26E-07	6.23E-08	0.00E+00	2.44E-08	1.58E-04	2.79E-04
IRP	kBq U235 eqv.	9.65E+01	3.90E+00	3.64E+00	2.88E+00	5.14E+00	5.24E+00	2.68E-01	0.00E+00	2.17E-01	1.37E+01	1.04E+02
PM	disease incidence	3.70E-04	5.27E-06	5.12E-06	4.10E-06	2.41E-05	2.41E-05	3.81E-07	0.00E+00	3.50E-07	-4.65E-05	3.80E-04
SQP	-	1.50E+04	7.62E+02	1.97E+03	5.96E+02	1.53E+02	1.56E+02	5.54E+01	0.00E+00	1.11E+02	-1.24E+03	1.78E+04
<p>ADP-mm= Abiotic depletion potential for non-fossil resources ADP-f=Abiotic depletion for fossil resources potential AP= Acidification potential, Accumulated Exceedance EP-fw = Eutrophication potential, fraction of nutrients reaching freshwater end compartment EP-m= Eutrophication potential, fraction of nutrients reaching marine end compartment EP-T= Eutrophication potential, Accumulated Exceedance GWP-b=Global Warming Potential biogenic GWP-f=Global Warming Potential fossil fuels GWP-luluc=Global Warming Potential land use and land use change GWP-total=Global Warming Potential total ODP=Depletion potential of the stratospheric ozone layer POCP=Formation potential of tropospheric ozone WDP=Water (user) deprivation potential, deprivation- weighted water consumption ETP-fw=Potential Comparative Toxic Unit for ecosystems HTP-c=Potential Toxic Unit for Humans toxicity, cancer HTP-nc= Potential Toxic Unit for humans, non-cancer IRP=Potential Human exposure efficiency relative to U235, human health PM=Potential incidence of disease due to Particulate Matter emissions SQP=Potential soil quality index</p>												

Table 5: Results (continued)

Results of the LCA – Environmental impact: 1 ton line and process pipes(EN 15804+A2)												
Parameter	Unit	A1	A2	A3	A4	A5	C1	C2	C3	C4	D	Total A1-A3
PERE	MJ	4.30E+03	1.85E+01	1.04E+03	8.60E+00	6.48E+00	8.54E+00	7.99E-01	0.00E+00	4.28E-01	1.63E+02	5.35E+03
PERM	MJ	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
PERT	MJ	4.30E+03	1.85E+01	1.04E+03	8.60E+00	6.48E+00	8.54E+00	7.99E-01	0.00E+00	4.28E-01	1.63E+02	5.35E+03
PENRE	MJ	4.70E+04	9.53E+02	4.18E+03	7.29E+02	1.27E+03	1.28E+03	6.78E+01	0.00E+00	5.63E+01	-5.82E+03	5.21E+04
PENRM	MJ	0.00E+00	0.00E+00	4.95E+01	0.00E+00	0.00E+00	4.76E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	4.95E+01
PENRT	MJ	4.70E+04	9.53E+02	4.23E+03	7.29E+02	1.27E+03	1.29E+03	6.78E+01	0.00E+00	5.63E+01	-5.82E+03	5.22E+04
SM	kg	1.15E+02	0.00E+00	1.07E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	1.16E+02
RSF	MJ	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
NRSF	MJ	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
FW	m ³	3.12E+01	1.43E-01	8.16E-01	8.37E-02	6.17E-02	9.23E-02	7.78E-03	0.00E+00	5.65E-02	-2.90E+00	3.22E+01
HWD	kg	2.65E-01	2.22E-03	4.61E-03	1.74E-03	3.26E-03	3.27E-03	1.62E-04	0.00E+00	7.92E-05	-9.64E-02	2.71E-01
NHWD	kg	1.71E+03	5.21E+01	2.19E+01	4.36E+01	1.42E+00	1.46E+00	4.05E+00	0.00E+00	3.60E+02	-7.86E+01	1.79E+03
RWD	kg	9.52E-02	5.86E-03	4.02E-03	4.51E-03	8.32E-03	8.41E-03	4.19E-04	0.00E+00	3.48E-04	4.73E-03	1.05E-01
CRU	kg	0.00E+00	0.00E+00	4.62E-01	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	4.62E-01
MFR	kg	0.00E+00	0.00E+00	2.01E+01	0.00E+00	0.00E+00	0.00E+00	0.00E+00	6.32E+02	0.00E+00	0.00E+00	2.01E+01
MER	kg	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
EE	MJ	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
EET	MJ	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
EEE	MJ	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00

PERE=Use of renewable primary energy excluding renewable primary energy resources used as raw materials | PERM= Use of renewable primary energy resources used as raw materials | PERT=Total use of renewable primary energy resources | PENRE= Use of non-renewable primary energy excluding non-renewable primary energy resources used as raw materials | PENRM= Use of non-renewable primary energy resources used as raw materials | PENRT= Total use of non-renewable primary energy resources | SM=Use of secondary material | RSF=Use of renewable secondary fuels | NRSF=Use of non-renewable secondary fuels | FW=Use of fresh water | HWD=Hazardous waste disposed | NHWD=Non-hazardous waste disposed | RWD=Radioactive waste disposed | CRU=Components for reuse | MFR=Materials for recycling | MER=Materials for energy recovery | EE=Exported energy | EET= Exported Energy Thermic | EEE= Exported Energy Electric

Table 6: Biogenic Carbon Content

LCA results- information on biogenic carbon content:1 ton line and process pipes / (EN15804+A2)		
Parameters	Unit	Value
Biogenic carbon content in the product	kg C	0
Biogenic carbon content in the associated packaging	kg C	0
Note: 1 kg of biogenic carbon corresponds to 44/12 kg of CO ₂		

5.2 Calculation of the MKI value (Dutch: Milieukostenindicator, English: Environmental Cost Indicator, ECI)

The results are aggregated to a single-point score using the shadow price method, which is presented in the SBK Determination Method (2009) and NMD Environmental Performance Assessment Method for Construction (2022). The ECI is a suitable valuation method, especially in the Dutch construction sector. In the Netherlands, it is a prerequisite for public tenders. The indicator aims to show the shadow price for the environmental impacts of a product or project. The following weighting is used for aggregation:

Table 7: Weighting factors (for the environmental impact categories) (NMD 2022)

Impact	Equivalent Unit	Weighting [€/ Equivalent Unit]
Depletion of abiotic raw materials (excluding fossil energy carriers) - ADP	kg Sb eq.	0.16
Depletion of fossil energy carriers - ADP	kg Sb eq.	0.16
Global warming - GWP 100 years	kg CO ₂ eq	0.05
Ozone layer depletion - ODP	kg CFC-11 eq	30
Photochemical oxidant-formation - POCP	kg C ₂ H ₄ eq	2
Acidification - AP	kg SO ₂ eq	4
Eutrophication - EP	kg PO ₄ ³⁻ eq	9
Human toxicity - HTP	1,4-DCB eq	0.09
Freshwater aquatic ecotoxicity - FAETP	1,4-DCB eq	0.03
Marine aquatic ecotoxicity - MAETP	1,4-DCB eq	0.0001
Terrestrial ecotoxicity - TETP	1,4-DCB eq	0.06

Due to its weighting, the impact category GWP has the greatest influence on the indicator score. The application of single-point scores is an additional assessment tool for eco-balance results. However, it must be pointed out that weightings are always based on value maintenance and not on a scientific basis (EN 14040). The ECI results are shown in the following tables.

Table 8: Results - MKI value (1-point evaluation) per 1 ton Line and process pipe

Module EN15804	ECI NL (€)per module	Share in total (%)
A1 Raw Materials Supply	1767.8	101.6
A2 Transport	7.2	0.4
A3 Manufacturing	28.0	1.6
A4 Transport from the gate to the site	5.4	0.3
A5 Construction - Installation process	11.5	0.7
C1 Demolition	11.6	0.7
C2 Transport	0.50	0.0
C3 Waste processing	0.00	0.0
C4 Final disposal	0.26	0.0
D Benefits and loads beyond the product system boundary	-93.4	-5.4
ECI NL per functional unit	1739.1	

Note: Users of weighting factors should be aware that there is less consensus on weighting and weighting factors than, for example, on characterization factors and that the method is also subject to uncertainties (NMD 2022).

6. LCA: Interpretation

The following figure shows the impact categories for 1 ton of the line and process pipe.

Line and process pipes account for 38% of total EEW PPE output by mass and all supplier contributions, energy usage, and additional materials were allocated proportionally according to the 38% mass ratio. All input values (raw and ancillary materials, energy) were calculated considering 1 ton of product (line and process pipe) as the reference point.

As shown in the Figure 2, A1 (raw material supply) shows the most significant influence on environmental core indicators. This is primarily due to the use of heavy plates, which notably impacts the environmental life cycle of the product. In general, line and process pipes have the potential for recycling. As a result, D has a credit outside of the production system based on the waste scenario.

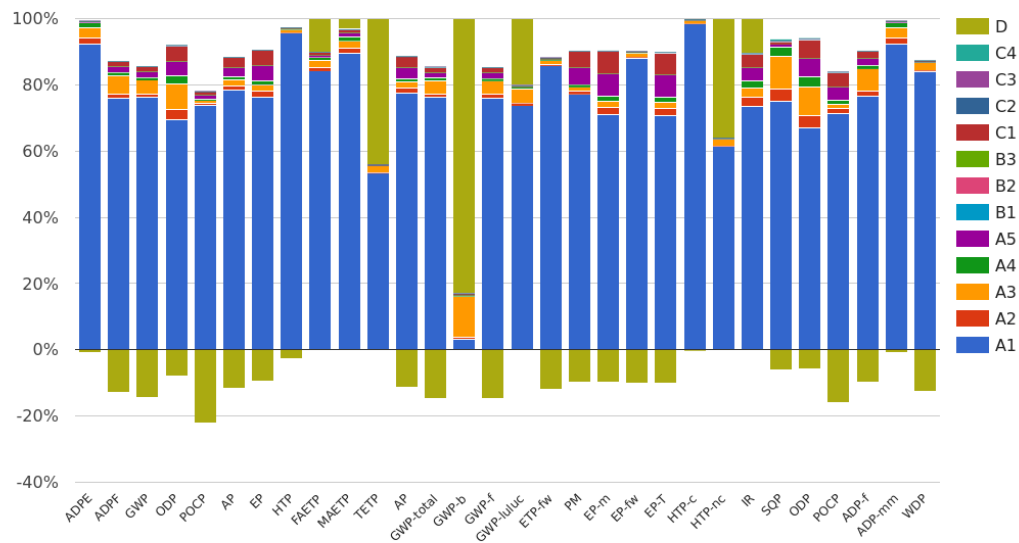


Figure 2: Line and process pipes - Impact of the individual modules on the environmental core indicators (NMD set 1+2)

7. References

ecoinvent Datenbank Version 3.6 (2019)

EN 15804:2012+A2:2019 Sustainability of construction works — Environmental Product Declarations — Core rules for the product category of construction products

ISO 14040:2006, Environmental management - Life cycle assessment - Principles and framework

ISO 14044:2006, Environmental management - Life cycle assessment - Requirements and guidelines

ISO 14025:2006: Environmental labels and declarations — Type III environmental declarations — Principles and procedures EN 13249

PCR A: Kiwa-Ecobility Experts, Berlin, 2022: PCR A – General Program Category Rules for Construction Products from the EPD programme of Kiwa-Ecobility Experts; Version 2.1

PCR B: PCR B - Requirements on the Environmental Product Declarations for construction steel products (Edition 2020-03-13 (draft))

R<THiNK 2023; Online-EPD-Tool by NIBE B.V.

SimaPro Software, Industry data LCA library; website: <https://simapro.com/databases/industry-data-lca-library>

CML-IA April 2013 – Charakterisierungsfaktoren entwickelt durch Institut of Environmental Sciences (CML): Universität Leiden, Niederlande - <http://www.cml.leiden.edu/software/data-cmlia.html>

European Commission Joint Research Centre Institute for Prospective Technological Studies (JRC 2014): End-of-waste criteria for waste plastic for conversion, Seville, 2014, doi:10.2791/13033

Stichting Bouwkwaliiteit (SBK 2019): Assessment Method - Environmental Performance Construction and Civil Engineering Works (GWW), Rijswijk, Version "3.0 January 2019" incl. amendments July 2019, Jan 2020

Stichting Bouwkwaliiteit: verification protocol - inclusion data in the Dutch environmental database, Rijswijk, Final Version 3.0, January 2019

NMD STICHTING NATIONAL ENVIRONMENTAL DATABASE: Environmental Performance Assessment Method for Construction; 1.1 (March 2022); Rijswijk

Protocol EPD-online - 25011.16.03.015 - Protocol EPD online - NMD, version 1.2, November 2016, NIBE

self propelled jack-up barge, https://www.damentrading.com/-/media/Trading/For-Sale/Jack-up-barge/07613-Used-self-propelled-jack-up-barge/Downloads/07613_self_propelled_barge_damen_trading_01.pdf. adopted on 12.09.2022.

Livaniou, S., Iordanis, S., Anaxagorou, P., Mocanu, B., Sykes, R., Goormachtigh, J., ... & Antrobus, M. (2015). Logistic Efficiencies And Naval architecture for Wind Installations with Novel Developments. Tech. Rep. 614020, Leanwind.

Topham, Eva, David McMillan, Stuart Bradley, and Edward Hart. "Recycling offshore wind farms at decom-missioning stage." Energy policy 129 (2019): 698-709.

Molina, F.S., 2021. An LCA Review of Current Status and Future Trends of the Offshore Wind Industry. University of California, Davis.

Gokhale, A.U., 2020. Assessment of recycling potential and circularity in decommissioning of offshore wind farms.

	<p>Publisher Kiwa-Ecobility Experts Kiwa GmbH, Ecobility Experts Wattstraße 11-13 Haus 1, 3. OG, TH 1 13355 Berlin Germany</p>	<p>Mail Web</p>	<p>DE.Ecobility.Experts@kiwa.com https://www.kiwa.com/de/de/themes/ecobility-experts/ecobility-experts/</p>
	<p>Programme operator Kiwa-Ecobility Experts Kiwa GmbH, Ecobility Experts Wattstraße 11-13 Haus 1, 3. OG, TH 1 13355 Berlin Germany</p>	<p>Mail Web</p>	<p>DE.Ecobility.Experts@kiwa.com https://www.kiwa.com/de/de/themes/ecobility-experts/ecobility-experts/</p>
	<p>Author of the Life Cycle Assessment Kiwa GmbH, Ecobility Experts, Construction Products Wattstraße 11-13 Haus 1, 3. OG, TH 1 13355 Berlin Germany</p>	<p>Tel. Fax. Mail Web</p>	<p>+49 (0) 30 467761-43 +49 (0) 30 467761-10 DE.Nachhaltigkeit@kiwa.com https://www.kiwa.com/</p>
	<p>Owner of the declaration EEW Pipe Production Erndtebrück GmbH & Co.KG Im Grünewald 2, 57339 Erndtebrück, Germany</p>	<p>Tel. Fax. Mail Web</p>	<p>(+49) 2753 609-0 (+49) 2753 609-190 info@eew-group.com EEW PPE in Erndtebrück - Kompetenzzentrum für Line and process pipes (eew-group.com)</p>

Kiwa-Ecobility Experts is established member of the

