


Environmental Product Declaration (EPD)  
According to ISO 14025 and EN 15804

# Sto-Dämmplatte Top32

Registration number:	EPD-Kiwa-EE-175348-en
Issue date:	10-10-2024
Valid until:	10-10-2029
Declaration owner:	Sto SE & Co. KGaA
Publisher:	Kiwa-Ecobility Experts
Programme operator:	Kiwa-Ecobility Experts
Status:	verified

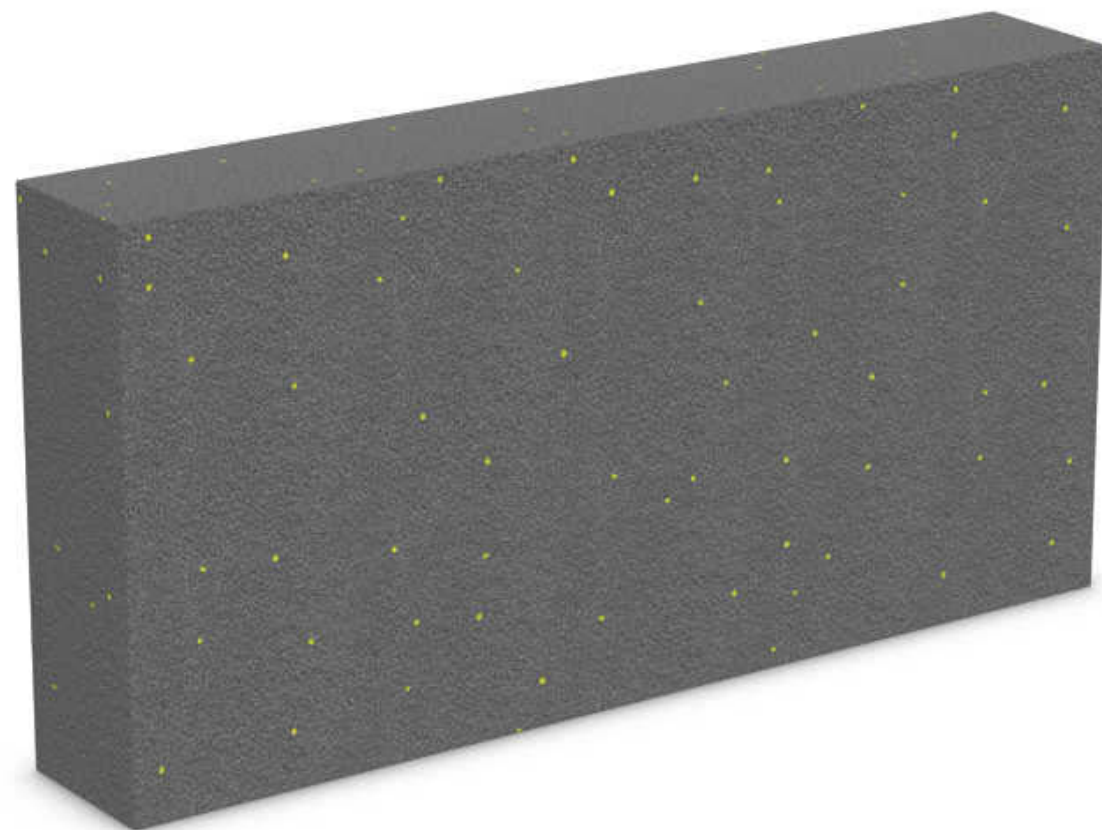

# 1 General information

## 1.1 PRODUCT

Sto-Dämmplatte Top32

## 1.2 REGISTRATION NUMBER

EPD-Kiwa-EE-175348-en

## 1.3 VALIDITY

**Issue date:** 10-10-2024

**Valid until:** 10-10-2029

## 1.4 PROGRAMME OPERATOR

Kiwa-Ecobility Experts  
Wattstraße 11-13  
13355 Berlin  
DE



Raoul Mancke

*(Head of programme operations, Kiwa-Ecobility Experts)*



Dr. Ronny Stadie

*(Verification body, Kiwa-Ecobility Experts)*

## 1.5 OWNER OF THE DECLARATION

**Manufacturer:** Sto SE & Co. KGaA

**Address:** Ehrenbachstraße 1, D-79780 Stühlingen

**E-mail:** infoservice@sto.com

**Website:** <https://www.sto.com>

**Production location:** Innolation GmbH

**Address production location:** Hanns-Martin-Schleyer-Straße 3, 89415 Lauingen

## 1.6 VERIFICATION OF THE DECLARATION

The independent verification is in accordance with the ISO 14025:2011. The LCA is in compliance with ISO 14040:2006 and ISO 14044:2006. The EN 15804:2012+A2:2019 serves as the core PCR.

Internal  External



Lucas Pedro Berman, Senda

## 1.7 STATEMENTS

The owner of this EPD shall be liable for the underlying information and evidence. The programme operator Kiwa-Ecobility Experts shall not be liable with respect to manufacturer data, life cycle assessment data and evidence.

## 1.8 PRODUCT CATEGORY RULES

Kiwa-Ecobility Experts (Kiwa-EE) – General Product Category Rules (2022-02-14)

## 1.9 COMPARABILITY

In principle, a comparison or assessment of the environmental impacts of different products is only possible if they have been prepared in accordance with EN 15804+A2. For the evaluation of the comparability, the following aspects have to be considered in particular: PCR used, functional or declared unit, geographical reference, the definition of the system boundary, declared modules, data selection (primary or secondary data, background database, data quality), scenarios used for use and disposal phases, and the

## 1 General information

life cycle inventory (data collection, calculation methods, allocations, validity period). PCRs and general program instructions of different EPD program operators may differ. Comparability needs to be evaluated. For further guidance, see EN 15804+A2 (5.3 Comparability of EPD for construction products) and ISO 14025 (6.7.2 Requirements for comparability).

### 1.10 CALCULATION BASIS

**LCA method R<THINK:** Ecobility Experts | EN15804+A2

**LCA software\*:** Simapro 9.1

**Characterization method:** EN 15804 +A2 Method v1.0

**LCA database profiles:** EcolInvent version 3.6

**Version database:** v3.17 (2024-05-22)

*\* Simapro is used for calculating the characterized results of the Environmental profiles within R<THINK.*

### 1.11 LCA BACKGROUND REPORT

This EPD is generated on the basis of the LCA background report 'Sto-Dämmplatte Top32' with the calculation identifier ReTHiNK-75348.

## 2 Product

### 2.1 PRODUCT DESCRIPTION

Sto-Dämmplatte Top32 is a insulation board made of expanded polystyrene granulate in accordance with EN 13163.

Composition of Sto-Dämmplatte Top32 is available in the following table:

Name	Value	Unit
polystyrene unfoamed granulate/ expandable	99	%
InnoPearls (colored expanded polysterene)	1	%

### 2.2 APPLICATION (INTENDED USE OF THE PRODUCT)

This list highlights Area of application of Sto-Dämmplatte Top32:

- Exterior and interior
- As an insulation board in external and internal wall insulation systems
- Fixing by bonding, or bonding and anchors
- In StoTherm AimS®, StoTherm Classic®, StoTherm Vario, and StoTherm In SiMo

Different methods can be used to apply adhesive to insulation boards, depending on the specific requirements and tools available. Below are the detailed methods and their respective guidelines:

Application Method	Details
<b>Manual/Machine to Insulation Board</b>	<p><b>Spot/Edge Bonding:</b></p> <ul style="list-style-type: none"> <li>· Apply adhesive all around the edges in a strip approx. 5 cm wide;</li> <li>· Apply three palm-sized dabs of adhesive to the centre of the board;</li> <li>· The adhesive contact surface must be at least 40 %.</li> </ul>
	<p><b>Full-Surface Bonding:</b></p> <ul style="list-style-type: none"> <li>· only possible on smooth substrates;</li> <li>· apply the adhesive using a notched trowel.</li> </ul>
<b>Machine to Wall</b>	

#### Beaded Application:

- adhesive contact surface: min. 60 %, max;
- distance between the adhesive: 10 cm;
- Comb the bonding mortar over the entire surface using a notched trowel immediately before installing the insulation boards.

### 2.3 REFERENCE SERVICE LIFE

#### RSL PRODUCT

As the entire life cycle of the product is not considered in the scope of the study, the specification of the reference service life (RSL) is voluntary. According to the information from the manufacturer, the RSL of the product is 40 years. This commentary refers to the standards EN 13163, EN 826, and EN 12089.

#### USED RSL (YR) IN THIS LCA CALCULATION:

40

### 2.4 TECHNICAL DATA

Technical data of Sto-Dämmplatte Top32 is available in the following table:

Characteristic	value	Unit
Bulk density	15	kg/m3
Compressive strength according to /EN 826	60	N/mm2
Bending tensile strength according to/EN12089/	115	N/mm2
Thermal conductivity (DEU)	0.032	W/(mK)
Thermal conductivity (EU)	0.031	W/(mK)

### 2.5 SUBSTANCES OF VERY HIGH CONCERN

No substance present in the product is present on the "List of Potentially Hazardous Substances" (SVHC) that are candidates for authorisation under REACH legislation. Candidate List of Substances of Very High Concern for Authorisation (SVHC) are part of the formulation with a mass percentage of > 0,1 of the mass of the construction product.

## 2 Product

### 2.6 DESCRIPTION PRODUCTION PROCESS

Sto Dämmplatte Top32 is produced in Lauingen by Innolation GmbH. The raw materials that are used in Sto Dämmplatte Top32 are produced and transported from suppliers located in Germany. The main market is Germany, Austria and Switzerland.

The production of Sto Dämmplatte Top32 comprises the following process steps :

#### Material Transport:

- Raw materials are purchased from external suppliers and transported to the manufacturing plant in Lauingen.

#### Mixing and Foaming:

- The raw materials are mixed and foamed using steam.


#### Storage and Shaping:

- The foamed material is stored in silos and pressed into block shapes.

- The blocks are then cut into the desired shapes.

#### Waste Management:

- All waste generated during the cutting process is reused in the production process

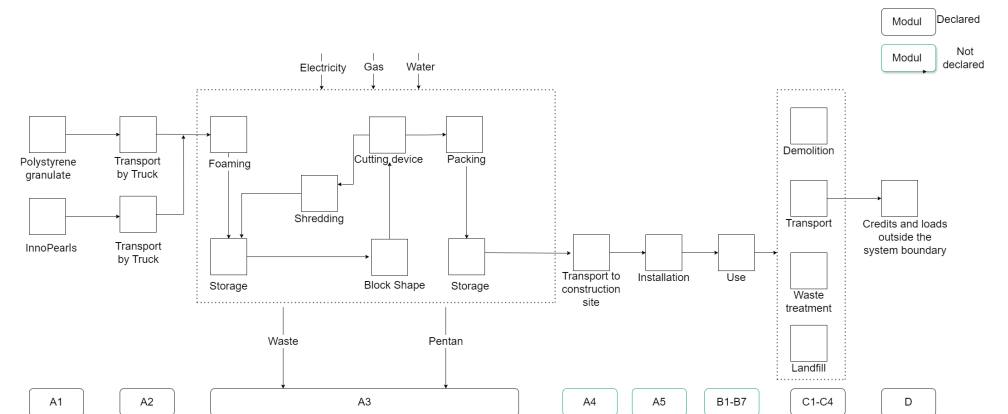

### 3 Calculation rules

#### 3.1 DECLARED UNIT

##### 1 cubic meter (m<sup>3</sup>) Sto-Dämmplatte Top32

In Life Cycle Assessment (LCA) calculations, 1 m<sup>3</sup> Sto-Dämmplatte Top32 was defined as the declared unit.

Reference unit: cubic meter (m<sup>3</sup>)

#### 3.2 CONVERSION FACTORS

Description	Value	Unit
Reference unit	1	m <sup>3</sup>
Weight per reference unit	15.000	kg
Conversion factor to 1 kg	0.066667	m <sup>3</sup>

#### 3.3 SCOPE OF DECLARATION AND SYSTEM BOUNDARIES

This is a Cradle to gate with modules C1-C4 and module D EPD. The life cycle stages included are as shown below:

(X = module included, ND = module not declared)

A1	A2	A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
X	X	X	ND	ND	ND	ND	ND	ND	ND	ND	ND	X	X	X	X	X

The modules of the EN15804 contain the following:

Module A1 = Raw material supply	Module B5 = Refurbishment
Module A2 = Transport	Module B6 = Operational energy use
Module A3 = Manufacturing	Module B7 = Operational water use
Module A4 = Transport	Module C1 = De-construction / Demolition
Module A5 = Construction - Installation process	Module C2 = Transport
Module B1 = Use	Module C3 = Waste Processing
Module B2 = Maintenance	Module C4 = Disposal
Module B3 = Repair	Module D = Benefits and loads beyond the product system boundaries
Module B4 = Replacement	

#### 3.4 REPRESENTATIVENESS

This EPD is representative for Sto-Dämmplatte Top32, a product of Sto SE & Co. KGaA. The results of this EPD are representative for Germany.

#### 3.5 CUT-OFF CRITERIA

##### Product stage (A1-A3)

All input flows (e.g. raw materials, transportation, energy use, packaging, etc.) and output flows (e.g. production waste) are considered in this LCA. The total neglected input flows do therefore not exceed the limit of 5% of energy use and mass.

### 3 Calculation rules

#### End of life stage (C1-C4)

All input flows (e.g. energy use for demolition or disassembly, transport to waste processing, etc.) and output flows (e.g. end-of-life waste processing of the product, etc.) are considered in this LCA. The total neglected input flows do therefore not exceed the limit of 5% of energy use and mass.

#### Benefits and loads beyond the system boundary (Module D)

All benefits and loads beyond the system boundary resulting from reusable products, recyclable materials and/or useful energy carriers leaving the product system are considered in this LCA.

#### Excluded Elements from LCA Calculation:

- The manufacture of equipment used in production, buildings or any other capital goods;
- The transport of personnel to the plant;
- The transportation of personnel within the plant;
- Research and development activities;
- Long-term emissions.

#### 3.6 ALLOCATION

Allocations were avoided as far as possible. No by-products or co-products are produced during the manufacture of the analysed product. The energy requirements of production were allocated to the individual products on the basis of energy consumption measurements. Specific information on the allocations within the background data can be found in the documentation of the Ecoinvent datasets.

#### 3.7 DATA COLLECTION & REFERENCE PERIOD

Primary data including all raw materials, packaging materials, energy consumption and ancillary materials was comprehensively collected for the reference year of 2022.

#### 3.8 ESTIMATES AND ASSUMPTIONS

- A payload factor of 50 percent was used for all truck transports, which in fact corresponds to a full delivery and empty return trip. A data set for a non-specific truck was used.
- The waste scenario for this LCA was determined based on NMD ID 24, which relates to EPS insulation materials produced since 2016 (HBCDD-free EPS, including insulation). According to this standard, the waste treatment process comprises 35% incineration and 65% recycling.

#### 3.9 DATA QUALITY

All primary data were collected by Sto SE & Co.KGaA, for the reference year of 2022.

For the data, which the manufacturer does not influence, generic data was used. Secondary data were sourced from the regularly updated Ecoinvent database (version 3.6), aligning with EN 15804 standards to ensure background data not exceeding 10 years.

ReTHiNK EPD web application was used to model the life cycle for the production and disposal of the declared product systems. To ensure that the results are comparable, consistent background data from the international database Ecoinvent was used in the LCA (e.g., data records on energy, transport, auxiliary materials, and supplies). Almost all consistent data sets contained in the Ecoinvent database are documented and can be viewed online.

The scenarios included are currently in use and are representative for one of the most likely scenario alternatives.

According to the criteria of the "UN Environmental Global Guidance on LCA database development" mentioned in EN 15804+A2, the data quality for all three representativeness categories (geographical, technical and time) can be described as good.

#### 3.10 POWER MIX

The electricity profile was selected using a market-based approach, aligned with the geographical reference area (Germany), and is sourced from 100% hydropower according to the guarantees of origin. The electricity used has a Global Warming Potential (GWP-total) of 0.01165 kg CO<sub>2</sub> eq per kilowatt-hour (kWh).

## 4 Scenarios and additional technical information

### 4.1 DE-CONSTRUCTION, DEMOLITION (C1)

The following information describes the scenario for demolition at end of life.

Description	Amount	Unit
Diesel, burned in machine (incl. emissions)	0.020	l

### 4.2 TRANSPORT END-OF-LIFE (C2)

The following distances and transport conveyance are assumed for transportation during end of life for the different types of waste processing.

Waste Scenario	Transport conveyance	Not removed (stays in work) [km]	Landfill [km]	Incineration [km]	Recycling [km]	Re-use [km]
EPS insulation since 2016 (HBCDD-free EPS i.a. insulation) (NMD ID 24)	Lorry (Truck), unspecified (default)   market group for (GLO)	0	100	150	50	0

The transport conveyance(s) used in the scenario(s) for transport during end of life has the following characteristics.

	Value and unit
Vehicle type used for transport	Lorry (Truck), unspecified (default)   market group for (GLO)
Fuel type and consumption of vehicle	not available
Capacity utilisation (including empty returns)	50 % (loaded up and return empty)
Bulk density of transported products	inapplicable
Volume capacity utilisation factor	1

### 4.3 END OF LIFE (C3, C4)

The scenario(s) assumed for end of life of the product are given in the following tables. First the assumed percentages per type of waste processing are displayed, followed by the assumed amounts.

Waste Scenario	Region	Not removed (stays in work) [%]	Landfill [%]	Incineration [%]	Recycling [%]	Re-use [%]
EPS insulation since 2016 (HBCDD-free EPS i.a. insulation) (NMD ID 24)	NL	0	0	35	65	0



## 4 Scenarios and additional technical information

Waste Scenario	Not removed (stays in work) [kg]	Landfill [kg]	Incineration [kg]	Recycling [kg]	Re-use [kg]
EPS insulation since 2016 (HBCDD-free EPS i.a. insulation) (NMD ID 24)	0.000	0.000	5.250	9.750	0.000
<b>Total</b>	<b>0.000</b>	<b>0.000</b>	<b>5.250</b>	<b>9.750</b>	<b>0.000</b>

### 4.4 BENEFITS AND LOADS BEYOND THE SYSTEM BOUNDARY (D)

The presented Benefits and loads beyond the system boundary in this EPD are based on the following calculated Net output flows in kilograms and Energy recovery displayed in MJ Lower Heating Value.

Waste Scenario	Net output flow [kg]	Energy recovery [MJ]
EPS insulation since 2016 (HBCDD-free EPS i.a. insulation) (NMD ID 24)	9.735	222.584
<b>Total</b>	<b>9.735</b>	<b>222.584</b>

## 5 Results

For the impact assessment, the characterization factors of the LCIA method EN 15804 +A2 Method v1.0 are used. Long-term emissions (>100 years) are not considered in the impact assessment. The results of the impact assessment are only relative statements that do not make any statements about end-points of the impact categories, exceedance of threshold values, safety margins or risks. The following tables show the results of the indicators of the impact assessment, of the use of resources as well as of waste and other output flows.

### 5.1 ENVIRONMENTAL IMPACT INDICATORS PER CUBIC METER

#### CORE ENVIRONMENTAL IMPACT INDICATORS EN15804+A2

Abbr.	Unit	A1	A2	A3	A1-A3	C1	C2	C3	C4	D
AP	mol H+ eqv.	1.74E-1	2.97E-3	5.13E-3	1.82E-1	6.86E-4	9.98E-4	1.22E-2	0.00E+0	-1.20E-1
GWP-total	kg CO2 eqv.	5.04E+1	5.12E-1	4.93E+0	5.58E+1	6.56E-2	1.72E-1	2.01E+1	0.00E+0	-4.24E+1
GWP-b	kg CO2 eqv.	4.29E-1	2.36E-4	4.85E-3	4.34E-1	1.82E-5	7.94E-5	-1.38E-2	0.00E+0	-2.88E-1
GWP-f	kg CO2 eqv.	4.99E+1	5.12E-1	4.92E+0	5.54E+1	6.56E-2	1.72E-1	2.01E+1	0.00E+0	-4.21E+1
GWP-luluc	kg CO2 eqv.	3.16E-4	1.87E-4	3.62E-4	8.66E-4	5.17E-6	6.31E-5	2.07E-3	0.00E+0	-3.25E-4
EP-m	kg N eqv.	2.62E-2	1.05E-3	1.27E-3	2.86E-2	3.03E-4	3.52E-4	3.71E-3	0.00E+0	-1.93E-2
EP-fw	kg P eq	8.59E-4	5.16E-6	2.68E-5	8.91E-4	2.39E-7	1.74E-6	6.02E-5	0.00E+0	-5.82E-4
EP-T	mol N eqv.	2.83E-1	1.15E-2	1.43E-2	3.08E-1	3.32E-3	3.88E-3	4.09E-2	0.00E+0	-2.08E-1
ODP	kg CFC 11 eqv.	7.38E-7	1.13E-7	6.68E-7	1.52E-6	1.42E-8	3.80E-8	2.73E-7	0.00E+0	-1.57E-6
POCP	kg NMVOC eqv.	1.52E-1	3.29E-3	4.79E-3	1.60E-1	9.13E-4	1.11E-3	1.27E-2	0.00E+0	-1.06E-1
ADP-f	MJ	1.16E+3	7.72E+0	7.76E+1	1.24E+3	9.02E-1	2.60E+0	3.61E+1	0.00E+0	-8.81E+2
ADP-mm	kg Sb-eqv.	2.85E-5	1.30E-5	1.04E-5	5.19E-5	1.01E-7	4.36E-6	4.48E-5	0.00E+0	-6.33E-6
WDP	m3 world eqv.	3.63E+1	2.76E-2	1.03E-1	3.64E+1	1.21E-3	9.28E-3	7.14E-1	0.00E+0	-2.51E+1

**AP**=Acidification (AP) | **GWP-total**=Global warming potential (GWP-total) | **GWP-b**=Global warming potential - Biogenic (GWP-b) | **GWP-f**=Global warming potential - Fossil (GWP-f) | **GWP-luluc**=Global warming potential - Land use and land use change (GWP-luluc) | **EP-m**=Eutrophication marine (EP-m) | **EP-fw**=Eutrophication, freshwater (EP-fw) | **EP-T**=Eutrophication, terrestrial (EP-T) | **ODP**=Ozone depletion (ODP) | **POCP**=Photochemical ozone formation - human health (POCP) | **ADP-f**=Resource use, fossils (ADP-f) | **ADP-mm**=Resource use, minerals and metals (ADP-mm) | **WDP**=Water use (WDP)

## 5 Results

### ADDITIONAL ENVIRONMENTAL IMPACT INDICATORS EN15804+A2

Abbr.	Unit	A1	A2	A3	A1- A3	C1	C2	C3	C4	D
ETP-fw	CTUe	6.10E+1	6.88E+0	1.19E+1	7.98E+1	5.44E-1	2.31E+0	1.17E+2	0.00E+0	-4.22E+1
PM	disease incidence	1.61E-6	4.60E-8	2.59E-8	1.68E-6	1.82E-8	1.55E-8	1.93E-7	0.00E+0	-1.06E-6
HTP-c	CTUh	8.61E-9	2.23E-10	8.55E-10	9.69E-9	1.90E-11	7.51E-11	6.21E-9	0.00E+0	-6.27E-9
HTP-nc	CTUh	1.07E-7	7.53E-9	1.32E-8	1.28E-7	4.67E-10	2.53E-9	7.42E-8	0.00E+0	-7.60E-8
IR	kBq U235 eqv.	7.16E-2	3.23E-2	4.08E-2	1.45E-1	3.87E-3	1.09E-2	1.09E-1	0.00E+0	-5.43E-2
SQP	Pt	3.43E+0	6.69E+0	1.99E+0	1.21E+1	1.15E-1	2.25E+0	2.87E+1	0.00E+0	-3.01E+0

**ETP-fw**=Ecotoxicity, freshwater (ETP-fw) | **PM**=Particulate Matter (PM) | **HTP-c**=Human toxicity, cancer (HTP-c) | **HTP-nc**=Human toxicity, non-cancer (HTP-nc) | **IR**=Ionising radiation, human health (IR) | **SQP**=Land use (SQP)

### CLASSIFICATION OF DISCLAIMERS TO THE DECLARATION OF CORE AND ADDITIONAL ENVIRONMENTAL IMPACT INDICATORS

ILCD classification	Indicator	Disclaimer
ILCD type / level 1	Global warming potential (GWP)	None
	Depletion potential of the stratospheric ozone layer (ODP)	None
	Potential incidence of disease due to PM emissions (PM)	None
	Acidification potential, Accumulated Exceedance (AP)	None
	Eutrophication potential, Fraction of nutrients reaching freshwater end compartment (EP-freshwater)	None
ILCD type / level 2	Eutrophication potential, Fraction of nutrients reaching marine end compartment (EP-marine)	None
	Eutrophication potential, Accumulated Exceedance (EP-terrestrial)	None
	Formation potential of tropospheric ozone (POCP)	None
	Potential Human exposure efficiency relative to U235 (IRP)	1
ILCD type / level 3	Abiotic depletion potential for non-fossil resources (ADP-minerals&metals)	2
	Abiotic depletion potential for fossil resources (ADP-fossil)	2
	Water (user) deprivation potential, deprivation-weighted water consumption (WDP)	2
	Potential Comparative Toxic Unit for ecosystems (ETP-fw)	2

## 5 Results

ILCD classification	Indicator	Disclaimer
	Potential Comparative Toxic Unit for humans (HTP-c)	2
	Potential Comparative Toxic Unit for humans (HTP-nc)	2
	Potential Soil quality index (SQP)	2

**Disclaimer 1** – This impact category deals mainly with the eventual impact of low dose ionizing radiation on human health of the nuclear fuel cycle. It does not consider effects due to possible nuclear accidents, occupational exposure nor due to radioactive waste disposal in underground facilities. Potential ionizing radiation from the soil, from radon and from some construction materials is also not measured by this indicator.

**Disclaimer 2** – The results of this environmental impact indicator shall be used with care as the uncertainties on these results are high or as there is limited experienced with the indicator.

### 5.2 INDICATORS DESCRIBING RESOURCE USE AND ENVIRONMENTAL INFORMATION BASED ON LIFE CYCLE INVENTORY (LCI)

#### PARAMETERS DESCRIBING RESOURCE USE

Abbr.	Unit	A1	A2	A3	A1- A3	C1	C2	C3	C4	D
PERE	MJ	6.01E+0	9.66E-2	8.30E+1	8.91E+1	4.88E-3	3.25E-2	1.78E+0	0.00E+0	-4.10E+0
PERM	MJ	0.00E+0	0.00E+0	2.80E-2	2.80E-2	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0
PERT	MJ	6.01E+0	9.66E-2	8.30E+1	8.91E+1	4.88E-3	3.25E-2	1.78E+0	0.00E+0	-4.10E+0
PENRE	MJ	1.24E+3	8.19E+0	8.54E+1	1.33E+3	9.58E-1	2.76E+0	3.84E+1	0.00E+0	-6.71E+2
PENRM	MJ	4.83E+0	0.00E+0	5.10E-1	5.34E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	-2.82E+2
PENRT	MJ	1.24E+3	8.19E+0	8.59E+1	1.34E+3	9.58E-1	2.76E+0	3.84E+1	0.00E+0	-9.54E+2
SM	Kg	1.50E-2	0.00E+0	0.00E+0	1.50E-2	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0
RSF	MJ	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0
NRSF	MJ	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0
FW	M3	8.46E-1	9.40E-4	3.87E-3	8.51E-1	4.65E-5	3.16E-4	2.20E-2	0.00E+0	-5.77E-1

**PERE**=renewable primary energy ex. raw materials | **PERM**=renewable primary energy used as raw materials | **PERT**=renewable primary energy total | **PENRE**=non-renewable primary energy ex. raw materials | **PENRM**=non-renewable primary energy used as raw materials | **PENRT**=non-renewable primary energy total | **SM**=use of secondary material | **RSF**=use of renewable secondary fuels | **NRSF**=use of non-renewable secondary fuels | **FW**=use of net fresh water

## 5 Results

### OTHER ENVIRONMENTAL INFORMATION DESCRIBING WASTE CATEGORIES

Abbr.	Unit	A1	A2	A3	A1-A3	C1	C2	C3	C4	D
HWD	Kg	1.09E-5	1.96E-5	9.83E-5	1.29E-4	2.46E-6	6.58E-6	6.18E-5	0.00E+0	-2.00E-4
NHWD	Kg	6.30E-1	4.89E-1	2.13E-1	1.33E+0	1.07E-3	1.65E-1	1.86E+0	0.00E+0	-4.69E-1
RWD	Kg	1.04E-4	5.07E-5	5.67E-5	2.11E-4	6.27E-6	1.70E-5	1.38E-4	0.00E+0	-7.90E-5

HWD=hazardous waste disposed | NHWD=non hazardous waste disposed | RWD=radioactive waste disposed

### ENVIRONMENTAL INFORMATION DESCRIBING OUTPUT FLOWS

Abbr.	Unit	A1	A2	A3	A1-A3	C1	C2	C3	C4	D
CRU	Kg	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0
MFR	Kg	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	9.75E+0	0.00E+0	0.00E+0
MER	Kg	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0
EET	MJ	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	-6.90E+1
EEE	MJ	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	-4.01E+1

CRU=Components for re-use | MFR=Materials for recycling | MER=Materials for energy recovery | EET=Exported Energy Thermic | EEE=Exported Energy Electric

## 5 Results

### 5.3 INFORMATION ON BIOGENIC CARBON CONTENT PER CUBIC METER

#### BIOGENIC CARBON CONTENT

The following Information describes the biogenic carbon content in (the main parts of) the product at the factory gate per cubic meter:


Biogenic carbon content	Amount	Unit
Biogenic carbon content in the product	0	kg C
Biogenic carbon content in accompanying packaging	0.0009091	kg C

#### UPTAKE OF BIOGENIC CARBON DIOXIDE

The following amount of carbon dioxide uptake is taken into account. Related uptake and release of carbon dioxide in downstream processes are not taken into account in this number although they do appear in the presented results. One kilogram of biogenic Carbon content is equivalent to 44/12 kg of biogenic carbon dioxide uptake.

Uptake Biogenic Carbon dioxide	Amount	Unit
Packaging	0.003333	kg CO2 (biogenic)

## 6 Interpretation of results

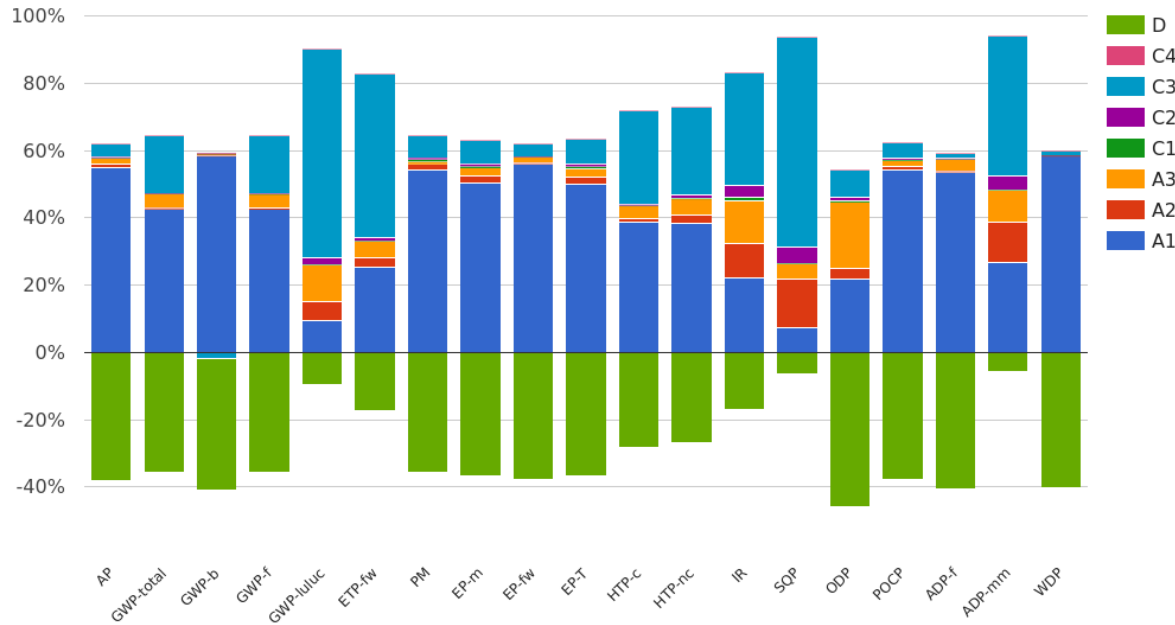

The figure illustrates the impact categories for 1 m3 of Sto-Dämmplatte Top32. As depicted, Modules A1, C3, and D emerge as the most significant contributors to most assessed indicators. The contribution of raw materials (A1) is notably higher, whereas transportation (A2 and C2) exhibits a comparatively minor impact. The contribution of manufacturing (A3) is low for most indicators, but it plays a significant role in some.

For all indicators, Module D indicates environmental benefits or credits.

## 7 References

### **ISO 14040**

ISO 14040:2006-10, Environmental management - Life cycle assessment - Principles and framework; EN ISO 14040:2006

### **ISO 14044**

ISO 14044:2006-10, Environmental management - Life cycle assessment - Requirements and guidelines; EN ISO 14040:2006

### **ISO 14025**

ISO 14025:2011-10: Environmental labels and declarations — Type III environmental declarations — Principles and procedures

### **EN 15804+A2**

EN 15804+A2: 2019: Sustainability of construction works — Environmental Product Declarations — Core rules for the product category of construction products

### **General PCR Ecobility Experts**

Kiwa-Ecobility Experts (Kiwa-EE) – General Product Category Rules (2022-02-14)

### *EN 13163: 2012*

Thermal insulation products for buildings – Factory made products of expanded polystyrene (EPS) – Specification

### **EN 826: 2013**

Thermal insulating products for building applications – Determination of compression behavior

### *EN12089: 2013*

Thermal insulating products for building applications – Determination of bending behavior



## 8 Contact information

Publisher	Operator	Owner of declaration
 <p><b>Kiwa-Ecobility Experts</b> Wattstraße 11-13 13355 Berlin, DE</p>	 <p><b>Kiwa-Ecobility Experts</b> Wattstraße 11-13 13355 Berlin, DE</p>	 <p><b>Sto SE &amp; Co. KGaA</b> Ehrenbachstraße 1 D-79780 Stühlingen, DE</p>
<p><b>E-mail:</b> DE.Ecobility.Experts@kiwa.com</p> <p><b>Website:</b> <a href="https://www.kiwa.com/de/en/themes/ecobility-experts/ecobility-experts-epd-program/">https://www.kiwa.com/de/en/themes/ecobility-experts/ecobility-experts-epd-program/</a></p>	<p><b>E-mail:</b> DE.Ecobility.Experts@kiwa.com</p> <p><b>Website:</b> <a href="https://www.kiwa.com/de/en/themes/ecobility-experts/ecobility-experts-epd-program/">https://www.kiwa.com/de/en/themes/ecobility-experts/ecobility-experts-epd-program/</a></p>	<p><b>E-mail:</b> infoservice@sto.com</p> <p><b>Website:</b> <a href="https://www.sto.com">https://www.sto.com</a></p>

Kiwa-Ecobility Experts is established member of the 